

Jandy® AquaPure™ Electronic Chlorine Generator Pure700 and Pure1400

Installation and Operation Manual



Table of Contents

Section 1. Safety Information	4
Section 2. System Description	5
2.1 Electrical Specifications.....	6
3.1 Materials and Tools.....	7
3.2 Installing the Power Supply for the PURE700 and PURE1400	7
3.3 Earth Bonding (Grounding)	8
3.4 Installing the Cell - Flow/Temp/Salinity Sensor for the PURE700 and PURE1400	8
Section 4. Pool Water Preparation	11
4.1 Determining Pool Size (m ³ of Water in Your Pool)	11
4.2 Determining Pool Size (Gallons of Water in Your Pool)	11
4.3 Selecting Model Size	12
4.4 Chemistry You Need to Know	12
4.5 Optimum Pool Water Conditions	13
4.6 Chlorine Testing	13
4.7 Salt (NaCl sodium chloride)	13
4.7.1 What Type of Salt to Use?	13
4.7.2 How Much Salt to Use?	14
4.7.3 How to Add Salt to the Pool?	14
Section 5. Operating Instructions.....	17
5.1 Controls.....	17
5.2 Display	17
5.3 Operation.....	18
5.4 Startup.....	19
5.4.1 Shocking	19
5.4.2 Apply power.....	19
5.5 Operating in Winter.....	20
5.6 Recommendations.....	20
Section 6. User Maintenance Instructions	21
6.1 Daily.....	21
6.2 Weekly	21
6.3 Monthly.....	21
6.4 Electrolytic Cell Cleaning	22
6.5 Flow/Temp/Salinity Sensor Cleaning	22
6.6 Winterizing.....	23
Section 7. Troubleshooting	24
7.1 Problems and Corrective Action	24
7.2 Service Codes.....	27
7.3 Additional Letter Codes.....	27
Section 8. Temperature Conversion.....	28
Warranty	32

Section 1. Safety Information

IMPORTANT SAFETY INSTRUCTIONS PERTAINING TO A RISK OF FIRE, ELECTRIC SHOCK, OR INJURY TO PERSONS

READ AND FOLLOW ALL INSTRUCTIONS

When installing and using this electrical equipment, basic safety precautions should always be followed, including the following:

WARNING

To reduce the risk of injury, do not permit children to use this product unless they are closely supervised at all times.

WARNING

To reduce the risk of injury, service should only be attempted by a qualified Pool Service Professional.

WARNING

When mixing acid with water, **ALWAYS ADD ACID TO WATER. NEVER ADD WATER TO ACID.**

CAUTION

Do not operate electrolytic cell without proper flow or water circulation. A buildup of flammable gases would result in hazardous conditions.

In order to comply with UL1081 Section 53.5 and UL1795 (Hydromassage Bathtubs) Sections 21.1, 59.5 and 63.1 and some local electrical codes: “Connect only to a circuit that is protected by a ground-fault circuit-interrupter (GFCI).” Such a GFCI should be provided by the installer and should be tested on a routine basis. To test the GFCI, push the test button. The GFCI should interrupt power. Push the reset button. Power should be restored. If the GFCI fails to operate in this manner, there is ground current flowing, indicating the possibility of an electric shock. Do not use this unit. Disconnect this unit and contact a qualified service representative before using.

A green colored terminal (or a wire connector marked “G”, “GR”, “Ground” or “Grounding”) is provided within the terminal compartment. To reduce risk of electric shock, connect this terminal or connector to the grounding terminal of your electric service or supply panel with a conductor equivalent in size to the circuit conductors supplying this equipment.

Power supply must be interconnected with Pool Pump motor power source. This insures the chlorinator and pool pump will turn on and off together.

Use of chemicals other than those recommended may be hazardous. Follow the Chemical Manufacturers Instructions.

The water Flow/Temp/Salinity Sensor must be located in the same piping as the electrolytic cell, without any valves or diverters between them. (See page 5 figure 1).

The Flow/Temp/Salinity Sensor must be mounted as in page 10 figure 4.

SAVE THESE INSTRUCTIONS

Section 2. System Description

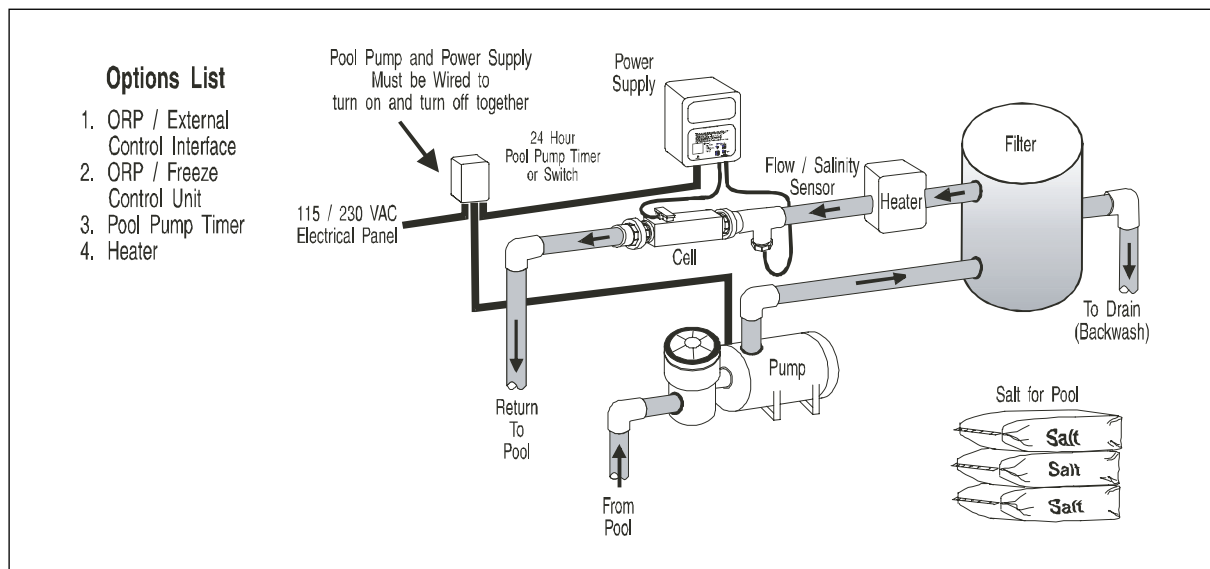


Figure 1. Typical Chlorinator Installation With Options



ATTENTION INSTALLER: Various application notes (more detailed instructions) are available from the Dealer covering installation, operation, maintenance, and plumbing of the chlorinator system.

The Chlorinator uses a process known as electrolysis to produce sodium hypochlorite (liquid chlorine) from a low concentration of salt added to the pool water. Hypochlorite kills bacteria, oxidizes organic material, and kills algae then reverts back to salt. The Chlorinator then reuses the salt and the process starts over again. The Chlorinator system is comprised of the following three component parts and two options.

Power Supply

The power supply converts AC electrical current to a low voltage DC current which is required by the cell to perform the electrolysis. The power supply is connected with the pool circulation pump electrical source so that the electrolytic cell only operates when the pool pump is on. The flow portion of the **Flow/Temp/Salinity Sensor** is a backup device only.

Electrolytic Cell

The electrolytic cell contains bipolar electrodes which perform the electrolysis and produce chlorine when energized with DC current. Chlorine is generated as pool water containing salt passes through the cell. The chlorine production can be varied by either adjusting the Chlorine Production Level on the power supply or by varying the number of hours the Chlorinator is on each day. ***The Chlorinator automatically cleans the Cell electrodes once every few hours. This does not interrupt the production of Chlorine.***

Flow/Salinity/Temperature Sensor The Flow/Temp/Salinity Sensor only allows the Cell to operate if there is adequate water flow through the Cell. The salinity portion of the Flow/Temp/Salinity Sensor detects the level of salt in the pool water. This salt level is displayed in grams per liter (gpl) on the Liquid Crystal Display (LCD) whenever the salinity button is pressed. This eliminates the need for manual pool water salinity testing. Pool Temperature is now available on all models by pressing the **Temperature** button.

Flow Sensor (mechanical) Mechanical Flow Sensor can be used with an Auxiliary Expansion board. Contact your local distributor for details.

Pool Pump Timer A Pool Pump Timer is not included as part of your Chlorinator. It is recommended that a timer be used to save on energy and prolong the service life of your pool pump and the Chlorinator.

2.1 Electrical Specifications

Circuit Protection 2 pole 20 AMP device at the Electrical Panel.

	Model PURE700	Model PURE1400
Input:	115 VAC, 50/60 Hz, 1.5 AMPS 230 VAC, 50/60 Hz, 0.75 AMPS	115 VAC, 50/60 Hz, 2.5 AMPS 230 VAC, 50/60 Hz, 1.25 AMPS
Output:	22-30 VDC @ 3 AMPS maximum	22-30 VDC @ 6 AMPS maximum
Chlorine:	0.625 lb. / 24 Hr. (283 gm / 24 Hr.)	1.25 lb. / 24 Hr. (567 gm / 24 Hr.)

⚠ CAUTION

Factory wired for 230 VAC service. If available electrical service is 115 VAC, the power supply wiring must be changed to operate on 115 VAC as shown in the wiring diagram below. (Figure 2.)

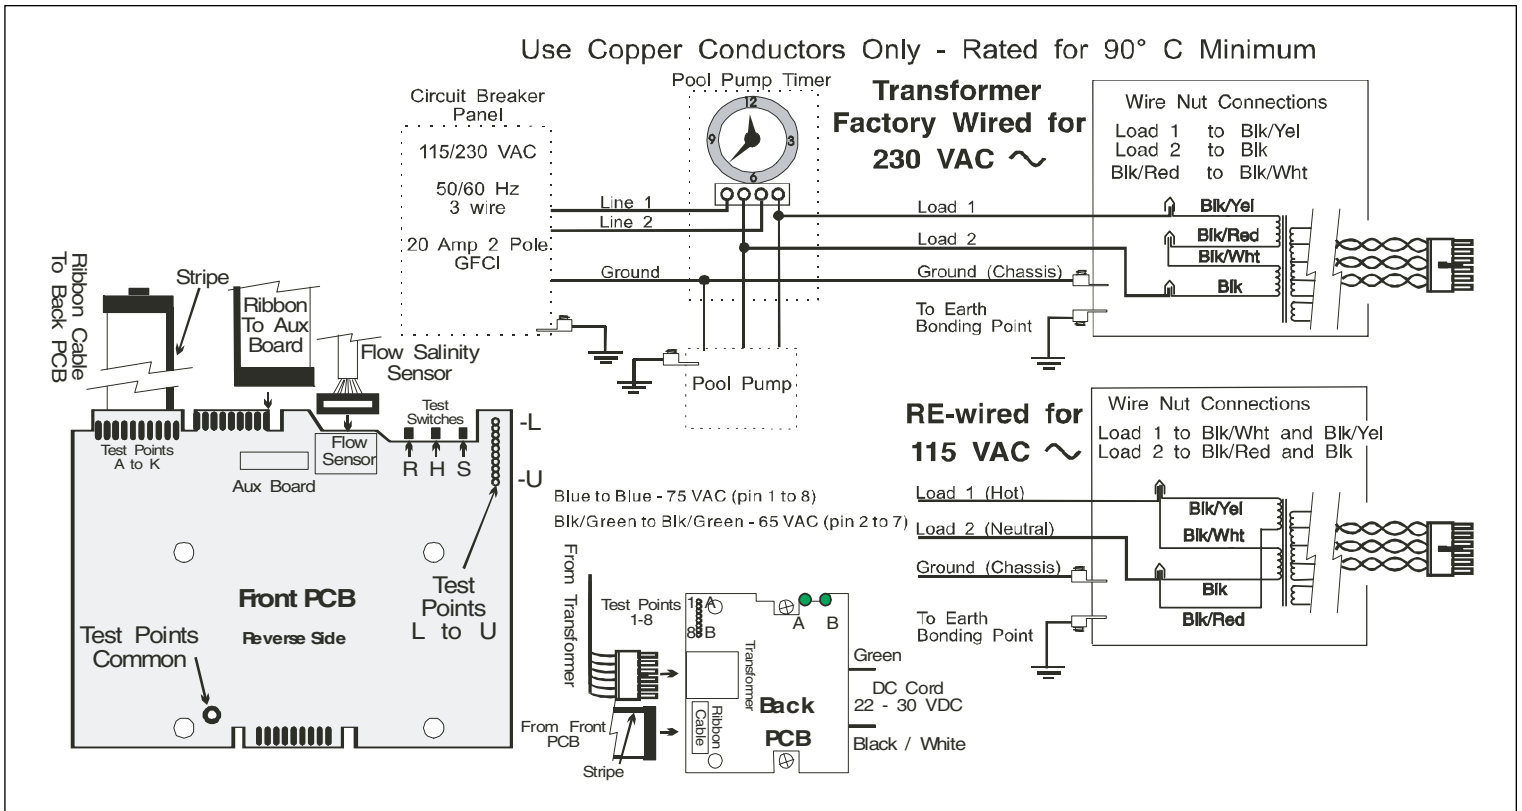


Figure 2. PURE700 and PURE1400

Section 3. Installation Instructions Model PURE700 and PURE1400

3.1 Materials and Tools

NOTE Salt not included. See pages 13-16.

Installation Materials Furnished	Tools Needed for Installation
(1 ea.) Electrolytic Cell	Tape Measure
(2 ea.) Cell Union with (2-ea.O-Rings) and 2" Tee	Phillips & Flathead Screwdrivers
(1 ea.) 2" to 1½" Reducing Bushing	Pliers
(1 ea.) Roll Teflon Tape	Hacksaw
(1 ea.) Flow/Temp/Salinity Sensor with 8 ft (2.44 m) cable	Voltmeter to determine line voltage of AC wiring to power supply
(1 ea.) 8 ft (2.44 m) DC Power Cord	Electric Drill Motor and 1/4 " masonry drill bit for mounting power supply on block or stucco wall
(1 ea.) Power Supply	An NSF® approved all purpose PVC/CPVC/ABS Cleaner Primer
(2 ea.) Anchors, Screws, Weather Seals, & Wire Nut	An NSF® approved all purpose PVC/CPVC/ABS Cement
(1 ea.) Owner's Manual - Warranty Information	
(1 ea.) Installation Template	

WARNING

When using electrical products, basic precautions should always be followed, including the following:

- **DANGER: RISK OF ELECTRIC SHOCK WHICH CAN RESULT IN SERIOUS INJURY OR DEATH.** Before attempting installation of service, ensure that all power to the circuit supplying power to the system is disconnected/turned off at the circuit breaker. Connect only to a circuit protected by a ground fault circuit-interrupter (GFCI).
- Grounding is required. The unit should be installed by a qualified service representative and grounded. (See Earth Bonding, page 8).
- Install to permit access for servicing.
- Read Cautions and Important Instructions on page 4. **Before attempting any electrical wiring, be sure to read and follow Safety Instructions. Wiring should only be attempted by a qualified professional.**

3.2 Installing the Power Supply for the PURE700 and PURE1400

1. Locate the power supply as close to the pump and filtration system as possible. Make sure the 8 ft (2.44 m) DC power cord and the 8 ft (2.44 m) Flow/Temp/Salinity Sensor cable can reach that section of pipe selected for the Cell and Flow/Temp/Salinity Sensor installation. ***Do not install the Power Supply Within 8 ft (2.44 m) of the pool edges.***
2. Use hardware provided and mount the power supply at eye level. Leave sufficient clearance on all sides of the backplate (chassis). If possible leave a minimum of 9½ inch (241 mm) on the left side. Mark screw centers and drill two ¼ inch (6.35 mm) holes spaced 6¼ inches (159 mm) on center. Install the anchors, rubber weather seal, and screws provided. See page 8 figure 3.
3. The power supply front cover is held to the metal back plate (chassis) by four retaining screws. Unscrew the four screws and remove the front cover. Position the back plate (chassis) keyhole slots over the two mounting screws just installed. Tighten the screws until snug. See page 8 figure 3.
4. Check source voltage. (All units are factory wired for 230 VAC). ***In order to use on 115 VAC, the internal factory wiring of the power supply must be changed. (See wiring diagram page 6 figure 2).***

5. Use #12/3 insulated wire and conduit. Wire power supply transformer to pool pump power source. The power supply should be connected to the pump motor switch or automatic timer (Pool Pump Timer) as shown. **The flow portion of the Flow/Temp/Salinity Sensor is a backup device only.** (See wiring diagram page 6 figure 2). Attach 3rd wire (Ground) from electrical panel to ground point inside Power Supply. **Earth bonding in next step must also be accomplished to insure personal safety and safety of equipment.**

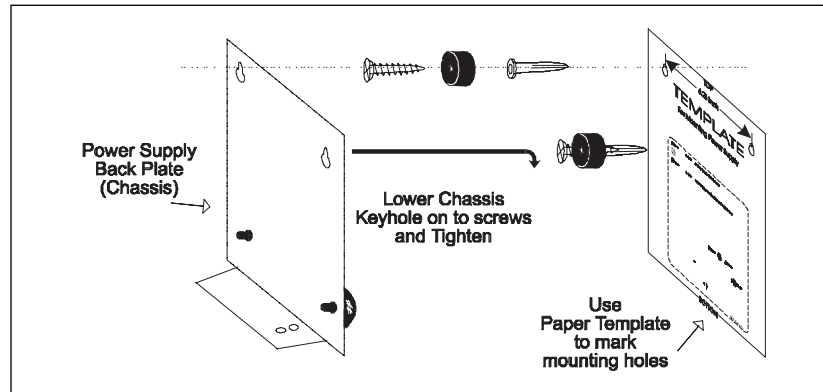


Figure 3. Mounting the Power Supply

3.3 Earth Bonding (Grounding)

A # 8 awg (8.4 mm²) wire is recommended for connecting the power supply to a Permanent Earth Ground connection that is acceptable to the local inspection authority. Attach the bonding point located on bottom of the back plate (chassis) to a Common Earth Bonding Point. Do Not use the Chlorinator as the Common Bonding Point. Each piece of non-Chlorinator pool equipment requiring a ground should be bonded to the Common Approved Earth Bonding Point. **Never ground pool pump to back plate (chassis).**

3.4 Installing the Cell - Flow/Temp/Salinity Sensor for the PURE700 and PURE1400

NOTE: Maximum operating Pressure is 517 kPa or 75 PSI - Minimum Flow Rate is 20 GPM (76 L/m).

WARNING

ATTENTION INSTALLER: If The Flow/Temp/Salinity Sensor is not installed properly, it may allow the Cell to operate without water flow. This would cause a buildup of flammable gases resulting in a HAZARDOUS Condition.

- Mount as on page 10 figure 4 Detail A. This will result in the most reliable operation.
- The Flow/Temp/Salinity Sensor must be mounted:
 - (1) in the same line as the Electrolytic Cell.
 - (2) with no valves or diverters between the Flow/Temp/Salinity Sensor and Cell.
 - (3) preferably between the Pool Pump and the Cell.
- Do not mount as Flow/Temp/Salinity Sensor as Detail C in Figure 4. This mounting position can be HAZARDOUS.
- Anytime the Flow/Temp/Salinity Sensor is connected or disconnected and reconnected, the AC power to the unit must be turned off and back on (Cycle Power). If power is not cycled, unreliable operation of the Flow/Temp/Salinity Sensor *will* result.

1. Be sure pool pump is turned off.

2. The Flow/Temp/Salinity Sensor and Electrolytic Cell must be installed in the pool return line after the filter and heater. Water passes through the Flow/Temp/Salinity Sensor before the Cell. The Cell can be installed in either a horizontal, as shown (page 10 figure 5), or a vertical position.
3. Position the Flow/Temp/Salinity Sensor Tee and Cell in the recommended position (See page 10 figure 4 Detail A) and (page 5 figure 1).
4. Locate a suitable section of pipe, approximately 21 inches (533 mm) long. The Flow/Temp/Salinity Sensor cable and Cell DC cord **must** be able to reach from the power supply to this section.
5. If using 1½ inch (40 mm) pipe, cut out a 17 7/8 inch (454 mm) section of pipe to insert the Cell - Flow/Temp/Salinity Sensor Assembly (page 10 figure 6).
If using 50 mm (2 inch) pipe, cut out a 19 3/8 inch (492 mm) section of pipe to insert the Cell - Flow/Temp/Salinity Sensor Assembly (page 10 figure 6)
6. Clean the cut ends of the pipe, 2 inch X 2 inch X 1½ inch Tee, and 1½ or 2 inch ABS Union with an appropriate NSF® approved PVC/ABS cleaner/primer. Glue the ABS Union and Tee onto the cut pipe ends using an appropriate all purpose NSF® approved cement for ABS, PVC, or CPVC. Tighten the ABS Unions. **Hand Tighten Only.** Allow sufficient drying time before pressurizing system.
7. Wrap the Flow/Temp/Salinity Sensor threads with Teflon tape ONLY (do not use silicone or pipe dope). **Be sure the Flow/Temp/Salinity Sensor (circular metal disks) are free of glue, excess Teflon tape, or any other debris.**
8. Install the Flow/Temp/Salinity Sensor into the 1½ inch threaded opening of the 2 inch X 2 inch X 1½ inch Tee. Tighten to prevent water leakage. **Do not over tighten.**
9. Feed the connector end of the Flow/Temp/Salinity Sensor cable through the DC cord strain relief fitting located in the bottom of the power supply back plate (chassis). **Be certain the connector is clean and dry**, then plug the cable into the connector on the power supply Printed Circuit Board as shown on page 6 figure 2. **(Do not pull Flow/Temp/Salinity Sensor cable too tight, allow a little slack).**
10. Plug the DC cord into the Cell stud terminals protruding from the Cell top. (Plug in - in either direction).

 **WARNING**

Do not operate the electrolytic cell without water circulation. A buildup of flammable gases will result in hazardous conditions.

11. Connect the DC cord to the Power Supply. Feed the DC cord through the same strain relief fitting as the Flow/Temp/Salinity Sensor. Plug the DC cord into the two push-on connectors located on the power supply Printed Circuit Board as shown. See page 6 figure 2.
12. Tighten strain relief fitting screws for the Flow/Temp/Salinity Sensor and the DC cord. **Do not pull Flow/Temp/Salinity Sensor cable or DC Cord too tight. Allow a little slack cable inside of Power Supply Enclosure.**
13. Prior to reattaching front cover, check the wiring. Be sure the Flow/Temp/Salinity Sensor is plugged in. The DC cord should be plugged in. Also, check the AC wiring.
14. Plug the ribbon cable attached to the front cover PC board into Printed Circuit Board mounted on back plate (See page 6 figure 2). Now reattach power supply front cover to the back plate.

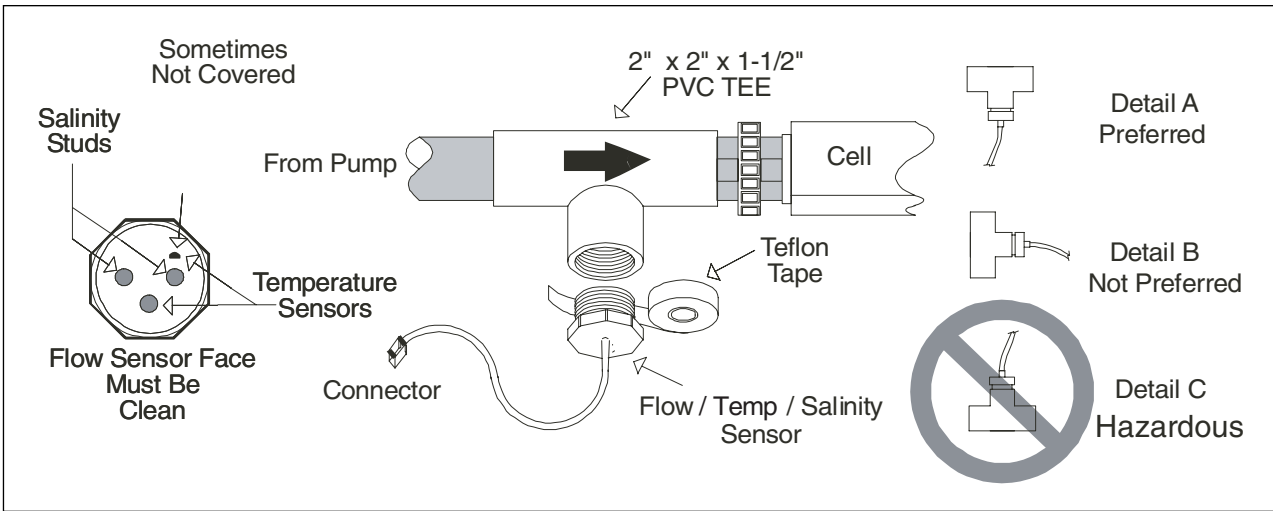


Figure 4. Flow/Temp/Salinity Sensor

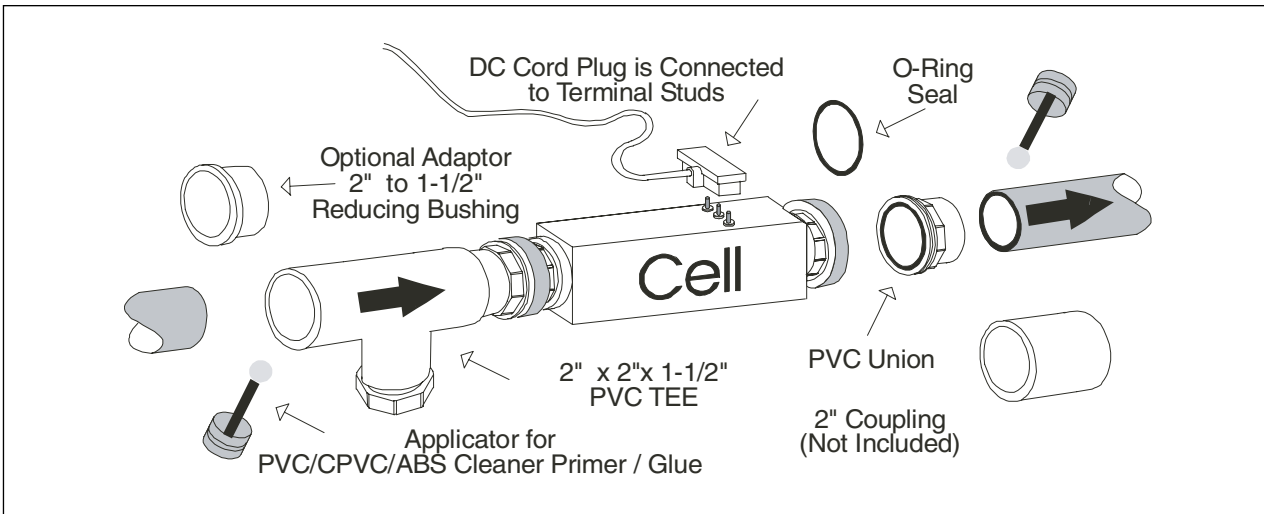


Figure 5. Cell Installation

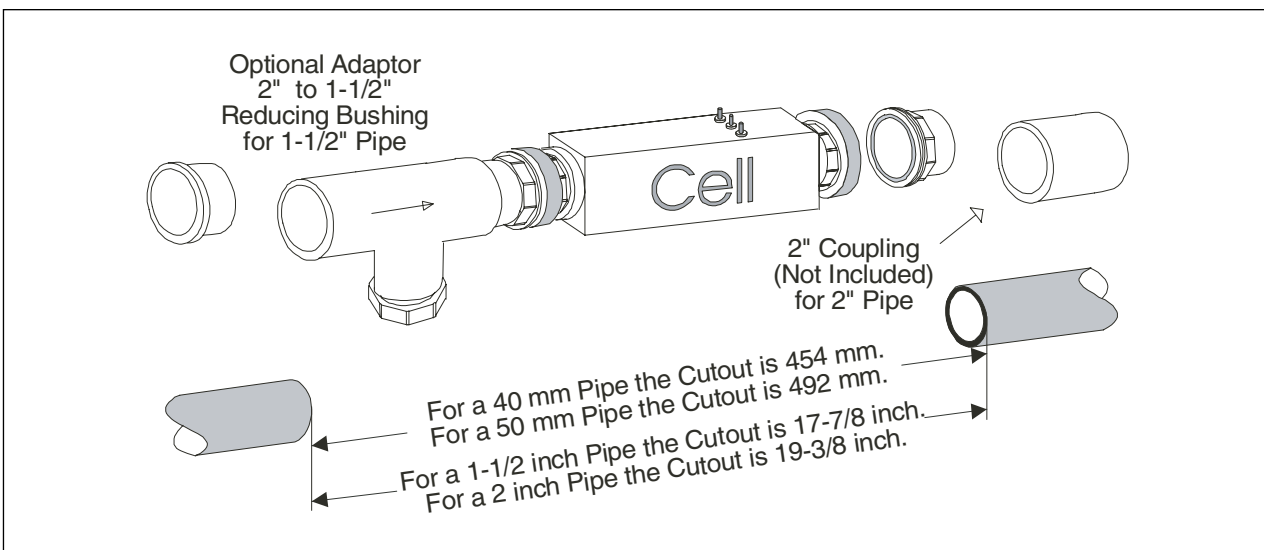


Figure 6. Pipe Cutout

Section 4. Pool Water Preparation

4.1 Determining Pool Size (m³ of Water in Your Pool)



ATTENTION INSTALLER: Various application notes (more detailed instructions) are available from the Dealer covering installation, operation, maintenance, and plumbing of the chlorinator system.

- **Rectangular Pools**
Average length (meters) x average width (meters) x average depth (meters) = m³ capacity.
- **Circular Pools**
Diameter (meters) x diameter (meters) x average depth (meters) x 0.79 = m³ capacity.
- **Oval Pools**
Long diameter (meters) x short diameter (meters) x average depth (meters) x 0.79 = m³ capacity.
- **Sloping Sides**
Multiply total m³ by 0.85 = m³ capacity.

4.2 Determining Pool Size (Gallons of Water in Your Pool)

- **Rectangular Pools**
Average length (feet) x average width (feet) x average depth (feet) x 7.5 = gallon capacity.
- **Circular Pools**
Diameter (feet) x diameter (feet) x average depth (feet) x 5.9 = gallon capacity.
- **Oval Pools**
Long diameter (feet) x short diameter (feet) x average depth (feet) x 5.9 = gallon capacity.
- **Sloping Sides**
Multiply total gallons by 0.85 = gallon capacity.

CAUTION

Never use dry acid to adjust pH in arid geographic areas with excessive evaporation and minimal dilution of pool water with fresh water. A buildup of by-products can damage the electrolytic cell.

4.3 Selecting Model Size

Model PURE700	Model PURE1400
Chlorine Production	Chlorine Production
0.625 lbs (283 gm) per 24 Hour period.	1.25 lbs (567 gm) per 24 Hour period.
Residential Pools	Residential Pools
One (1) unit per 57 m ³ (up to 15,000 gal) pool (year round use).	One (1) unit per 114 m ³ (up to 30,000 gal) pool (year round use).
One (1) unit per 66 m ³ (up to 17,500 gal) pool (winterized).	One (1) unit per 132 m ³ (up to 35,000 gal) pool (winterized).
Commercial Pools	Commercial Pools
Check With Manufacturer. See Commercial Sizing Guide.	Check With Manufacturer. See Commercial Sizing Guide.

4.4 Chemistry You Need to Know

1. **Chlorine Stabilizer** (cyanuric acid) is needed in outdoor pools to maintain proper levels of chlorine. Most unstable chlorine is destroyed by the UV radiation from the sun within 2 hours. Chlorine stabilizer should be maintained between 50 - 75 PPM. See Table 3, page 16.
2. **Nitrates** can cause extremely high chlorine demands and will deplete chlorine from your swimming pool. In some cases Nitrates may even lower your chlorine levels to zero. The local pool professional can test for Nitrates. Make sure Nitrates are not present in your pool.
3. **Metals** (some metals) can cause loss of chlorine. Also, metals can stain your pool. Have the local pool professional check for metals and recommend methods of removal.
4. **Chloramines** should not be present in pool water. When organic materials combine with Free Chlorine, Chloramines are formed. This ties up the Free Chlorine in your pool and does not allow the chlorine in your pool to disinfect. Chloramines also cloud pool water and burn the eyes. (Super Chlorinate (shock) to remove Chloramines at the initial startup of the pool).
5. **Super Chlorination** (Shocking) burns out the organic material that has combined with chlorine. This frees the chlorine for sanitizing. This is accomplished by raising the chlorine level quickly and dramatically. When the chlorine level is raised to 5 to 15 PPM the pool water is said to have been Super Chlorinated (shocked). This is where the Chlorinator really shines. As pool water is continuously passed through the Chlorinator Electrolytic Cell, all pool water inside the cell is being Super Chlorinated. When a Chlorinator is used on pools the pool water sparkles and does not burn the eyes because of the absence of Chloramines.

NOTE On initial startup of a pool, it is best to Super Chlorinate from an outside source, i.e., use a shock treatment available at your local pool supplier.

6. **pH** produced by the Chlorinator is close to Neutral pH. However, other factors usually cause the pH of the pool water to rise. Therefore, the pH in a pool chlorinated by the Chlorinator tends to stabilize at approximately 7.8. This is within NSPI standards. If the pool pH rises above 7.8 have a pool professional test to see if other factors such as high Calcium Hardness or Total Alkalinity are the cause and then balance accordingly.
7. **Total Dissolved Solids (TDS)** Adding salt to pool water will raise the TDS level. While this does not adversely affect the pool water chemistry or clarity, the pool water professional testing for TDS must be made aware salt has been added for the Chlorinator system. The individual performing the TDS test will then subtract the salinity level to arrive at the correct TDS level.

8. New Pool Water in a recently filled or newly refinished pool may contain undesirable matter. This undesirable matter could interfere with the Chlorinator's ability to chlorinate properly. Make sure the water is tested by a pool professional and properly balanced before turning on the Chlorinator.

4.5 Optimum Pool Water Conditions

In accordance with National Spa and Pool Institute (NSPI) standards, we recommend the following water balance conditions be maintained on an on-going basis to protect the pool finish and equipment and ensure the pleasing appearance of the water. The Chlorinator is warranted to operate properly only if these conditions are met.

Free Chlorine	2.0 - 3.0 PPM. Above 3.0 PPM may cause corrosion of pool metals.
Combined Chlorine (Chloramines)	None (Super Chlorinate to remove all Chloramines).
pH	7.2 - 7.8 (USE MURIATIC ACID to lower pH and Soda Ash to raise pH.).
Chlorine Stabilizer (Cyanuric Acid)	50 - 75 PPM
Total Alkalinity	80 - 120 PPM
Calcium Hardness	150 - 400 PPM
Metals (Copper, Iron, Manganese)	None
Nitrates	None

4.6 Chlorine Testing

It is recommended that chlorine test samples be taken from two places. Compare the samples. A higher level should be found at the pool return line. The higher level at the pool return line indicates the Chlorinator is producing chlorine.

1. At the pool return line.
2. 18 inches (457 mm) below the surface and well away from the pool return line.

4.7 Salt (NaCl sodium chloride)

4.7.1 What Type of Salt to Use?

- The purer the salt the better the life and performance of the electrolytic cell. Use a salt that is at least 99.8% pure NaCl. The preferred salt is an evaporated, granulated, food quality, non-iodized salt. Consult your salt supplier.
- Avoid using salt with anti-caking agents (sodium ferrocyanide, also known as YPS or yellow prussiate of soda) that could cause some discoloration of fittings and surface finishes in pool.
- Water conditioning salt pellets are compressed forms of evaporated salt and may be used but will take longer to dissolve.
- Do Not use calcium chloride as a source of salt. (Use sodium chloride only).
- Do Not use Rock salt (insoluble impurities mixed with the rock salt can shorten the life of the unit).

4.7.2 How Much Salt to Use?

Use the chart on the next page to determine how much salt will be needed. Most pools contain some salt depending on the water source and chemicals used for sanitizing. If the Chlorinator has not been wired and turned on yet, a hand held meter calibrated for NaCl (salt) can be used to determine the existing salt concentration of the water. If the Chlorinator is wired in (connected), use it to determine the salinity.

Turn the Chlorine Production down to 00% by pressing the arrow button **A** on front of unit. Operating the unit above 00% production without salt will damage Cell. The **Salinity** button **C** on the Chlorinator can be used to determine salinity in the case of a new pool installation, or a complete water change so long as the Chlorine Production is set to 00%. See page 19, Section 5.4.2, step 2.

- 3.0 to 3.5 gpl of salt is recommended for optimum water conditions.
- Low salt concentration below 2.0 gpl will cause premature cell failure.
- High salt concentration above 4.0 gpl may damage the power supply.
- High salt concentration above 6.0 gpl may cause corrosion damage to pool fixtures.

NOTE Should too much salt be inadvertently added to the pool see “Troubleshooting” page 24.

NOTE To convert gpl (grams per liter) of a salt solution to PPM (Parts Per Million) of a salt solution multiply by 1000, i.e., 3.0 gpl salt X 1000 = 3000 PPM salt.

4.7.3 How to Add Salt to the Pool?

1. Turn on pump to circulate pool water.
2. ***IMPORTANT - Turn the Chlorinator off by Pressing the arrow button A and setting CHLORINE PRODUCTION Rate to 00%.***
3. Determine amount of salt from the following charts.
4. Broadcast the salt around the outer perimeter of the pool for quick and even distribution.
5. ***To avoid clogging the filter or damaging power supply and pump, do not add salt through the skimmer or surge tank.***
6. Brush the pool bottom and allow water to circulate for 24 hours to dissolve completely and mix evenly with the pool water.
7. After 24 hours, verify correct salt reading.
8. Turn on the Chlorinator and set to desired Production rate (Press arrow button **B**).

Table 1. Approximate Pounds (kg) of Salt Needed to Obtain 3.0 gpl (3,000 PPM) in Pool

Salt Conc. Before Addition	Pool Size (gallons)										
	38 m ³ (10,000)	45 m ³ (12,000)	53 m ³ (14,000)	60 m ³ (16,000)	68 m ³ (18,000)	76 m ³ (20,000)	83 m ³ (22,000)	91 m ³ (24,000)	98 m ³ (26,000)	106 m ³ (28,000)	113 m ³ (30,000)
0.00 gpl	113 kg (250 lbs)	136 kg (300 lbs)	159 kg (350 lbs)	181 kg (400 lbs)	204 kg (450 lbs)	227 kg (500 lbs)	249 kg (550 lbs)	272 kg (600 lbs)	295 kg (650 lbs)	318 kg (700 lbs)	340 kg (750 lbs)
0.25 gpl	104 kg (230 lbs)	127 kg (280 lbs)	145 kg (320 lbs)	168 kg (370 lbs)	188 kg (415 lbs)	209 kg (460 lbs)	231 kg (510 lbs)	249 kg (550 lbs)	272 kg (600 lbs)	293 kg (645 lbs)	313 kg (690 lbs)
0.50 gpl	95 kg (210 lbs)	113 kg (250 lbs)	134 kg (295 lbs)	154 kg (340 lbs)	172 kg (380 lbs)	191 kg (420 lbs)	209 kg (460 lbs)	229 kg (505 lbs)	247 kg (545 lbs)	268 kg (590 lbs)	286 kg (630 lbs)
0.75 gpl	86 kg (190 lbs)	104 kg (230 lbs)	122 kg (270 lbs)	136 kg (300 lbs)	154 kg (340 lbs)	172 kg (380 lbs)	191 kg (420 lbs)	209 kg (460 lbs)	225 kg (495 lbs)	240 kg (530 lbs)	259 kg (570 lbs)
1.00 gpl	75 kg (165 lbs)	91 kg (200 lbs)	104 kg (230 lbs)	120 kg (265 lbs)	136 kg (300 lbs)	150 kg (330 lbs)	163 kg (360 lbs)	181 kg (400 lbs)	195 kg (430 lbs)	209 kg (460 lbs)	225 kg (495 lbs)
1.25 gpl	66 kg (145 lbs)	79 kg (175 lbs)	91 kg (200 lbs)	104 kg (230 lbs)	118 kg (260 lbs)	132 kg (290 lbs)	145 kg (320 lbs)	159 kg (350 lbs)	172 kg (380 lbs)	186 kg (410 lbs)	197 kg (435 lbs)
1.50 gpl	57 kg (125 lbs)	68 kg (150 lbs)	79 kg (175 lbs)	91 kg (200 lbs)	102 kg (225 lbs)	113 kg (250 lbs)	125 kg (275 lbs)	136 kg (300 lbs)	147 kg (325 lbs)	159 kg (350 lbs)	170 kg (375 lbs)
1.75 gpl	48 kg (105 lbs)	59 kg (130 lbs)	68 kg (150 lbs)	77 kg (170 lbs)	86 kg (190 lbs)	95 kg (210 lbs)	104 kg (230 lbs)	113 kg (250 lbs)	125 kg (275 lbs)	134 kg (295 lbs)	143 kg (315 lbs)
2.00 gpl	39 kg (85 lbs)	45 kg (100 lbs)	54 kg (120 lbs)	63 kg (140 lbs)	68 kg (150 lbs)	77 kg (170 lbs)	86 kg (190 lbs)	93 kg (205 lbs)	100 kg (220 lbs)	109 kg (240 lbs)	116 kg (255 lbs)
2.25 gpl	27 kg (60 lbs)	32 kg (70 lbs)	39 kg (85 lbs)	45 kg (100 lbs)	50 kg (110 lbs)	54 kg (120 lbs)	59 kg (130 lbs)	66 kg (145 lbs)	73 kg (160 lbs)	76 kg (168 lbs)	82 kg (180 lbs)
2.50 gpl	18 kg (40 lbs)	23 kg (50 lbs)	27 kg (60 lbs)	29 kg (65 lbs)	32 kg (70 lbs)	36 kg (80 lbs)	41 kg (90 lbs)	45 kg (100 lbs)	48 kg (105 lbs)	50 kg (110 lbs)	54 kg (120 lbs)
2.75 gpl	9 kg (20 lbs)	11 kg (25 lbs)	14 kg (30 lbs)	14 kg (30 lbs)	18 kg (40 lbs)	18 kg (40 lbs)	20 kg (45 lbs)	23 kg (50 lbs)	23 kg (50 lbs)	27 kg (60 lbs)	27 kg (60 lbs)

NOTE Add salt as required to maintain 3.0 gpl concentration

IMPORTANT Add 1.25 lbs (0.57 kg) of Stabilizer per 50 lbs (22.7 kg) of Salt.

Table 2. Approximate Pounds (kg) of Salt Needed to Maintain 3.0 gpl (3,000 PPM)

Salt Concentration. Before Addition	Salt Addition Required per 1000 gallon pool capacity	Salt Concentration Before Addition	Salt Addition Required per 1000 gallon pool capacity
0.0 gpl	25.6 lbs (11.6 kg)	1.5 gpl	12.8 lbs (5.8 kg)
0.3 gpl	23.5 lbs (10.7 kg)	1.8 gpl	10.7 lbs (4.8 kg)
0.5 gpl	21.4 lbs (9.7 kg)	2.0 gpl	8.5 lbs (3.9 kg)
0.8 gpl	19.2 lbs (8.7 kg)	2.3 gpl	6.4 lbs (2.9 kg)
1.0 gpl	17.1 lbs (7.8 kg)	2.5 gpl	4.2 lbs (1.9 kg)
1.3 gpl	15 lbs (6.8 kg)	2.8 gpl	2.2 lbs (1 kg)

Table 3. Approximate Amount of Chlorine Stabilizer (Cyanuric Acid) Needed to Obtain 75 PPM

Stabilizer Level Before Addition	Pool Size (gallons)										
	38 m ³ (10,000)	45 m ³ (12,000)	53 m ³ (14,000)	60 m ³ (16,000)	68 m ³ (18,000)	76 m ³ (20,000)	83 m ³ (22,000)	91 m ³ (24,000)	98 m ³ (26,000)	106 m ³ (28,000)	113 m ³ (30,000)
0.00 PPM	2.8 kg (6.25 lbs)	3.4 kg (7.50 lbs)	4 kg (8.75 lbs)	4.5 kg (10.0 lbs)	5 kg (11.25lb)	5.7 kg (12.5 lbs)	6.2 kg (13.75 lbs)	6.8 kg (15.0 lbs)	7.4 kg (16.3 lbs)	7.9 kg (17.5 lbs)	8.5 kg (18.75 lbs)
10 PPM	2.5 kg (5.40 lbs)	2.9 kg (6.50 lbs)	3.5 kg (7.60 lbs)	3.9 kg (8.60 lbs)	4.4 kg (9.75 lbs)	5 kg (10.8 lbs)	5.4 kg (11.90 lbs)	5.8 kg (12.9 lbs)	6.3 kg (14.0 lbs)	6.9 kg (15.2 lbs)	7.4 kg (16.25 lbs)
20 PPM	2 kg (4.60 lbs)	2.5 kg (5.50 lbs)	2.9 kg (6.40 lbs)	3.3 kg (7.30 lbs)	3.7 kg (8.25 lbs)	4.1 kg (9.20 lbs)	4.5 kg (10.0 lbs)	4.9 kg (10.9 lbs)	5.4 kg (11.9 lbs)	5.8 kg (12.8 lbs)	6.2 kg (13.75 lbs)
30 PPM	1.7 kg (3.75 lbs)	2 kg (4.50 lbs)	2.4 kg (5.25 lbs)	2.7 kg (6.00 lbs)	3 kg (6.75 lbs)	3.4 kg (7.50 lbs)	3.7 kg (8.25 lbs)	4 kg (9.00 lbs)	4.4 kg (9.75 lbs)	4.8 kg (10.5 lbs)	5.3 kg (11.75 lbs)
40 PPM	1.3 kg (2.90 lbs)	1.6 kg (3.50 lbs)	1.8 kg (4.00 lbs)	2 kg (4.60 lbs)	2.4 kg (5.25 lbs)	2.6 kg (5.80 lbs)	2.9 kg (6.40 lbs)	3.1 kg (6.90 lbs)	3.4 kg (7.58 lbs)	3.7 kg (8.20 lbs)	4 kg (8.75 lbs)
50 PPM	1 kg (2.00 lbs)	1.1 kg (2.50 lbs)	1.3 kg (2.90 lbs)	1.5 kg (3.30 lbs)	1.7 kg (3.75 lbs)	1.9 kg (4.10 lbs)	2 kg (4.60 lbs)	2.2 kg (4.90 lbs)	2.4 kg (5.40 lbs)	2.6 kg (5.80 lbs)	2.8 kg (6.25 lbs)
60 PPM	0.5 kg (1.25 lbs)	0.7 kg (1.50 lbs)	0.8 kg (1.75 lbs)	1 kg (2.00 lbs)	1 kg (2.25 lbs)	1.1 kg (2.50 lbs)	1.2 kg (2.75 lbs)	1.4 kg (3.00 lbs)	1.5 kg (3.25 lbs)	1.6 kg (3.50 lbs)	1.7 kg (3.75 lbs)
70 PPM	0.2 kg (0.40 lbs)	0.2 kg (0.50 lbs)	0.3 kg (0.60 lbs)	0.3 kg (0.66 lbs)	0.3 kg (0.75 lbs)	0.4 kg (0.80 lbs)	0.4 kg (0.90 lbs)	0.4 kg (1.00 lbs)	0.5 kg (1.10 lbs)	0.5 kg (1.20 lbs)	0.6 kg (1.25 lbs)
75 PPM	0 kg (0.0 lbs)	0 kg (0.0 lbs)	0 kg (0.0 lbs)	0 kg (0.0 lbs)	0 kg (0.0 lbs)	0 kg (0.0 lbs)	0 kg (0.0 lbs)	0 kg (0.0 lbs)	0 kg (0.0 lbs)	0 kg (0.0 lbs)	0 kg (0.0 lbs)

NOTE Add 1.25 lbs (0.57 kg) Chlorine Stabilizer to the pool every time 50 lbs (22.7 kg) of Salt is added to the pool. The Stabilizer reading should be maintained at 75 PPM.

Section 5. Operating Instructions

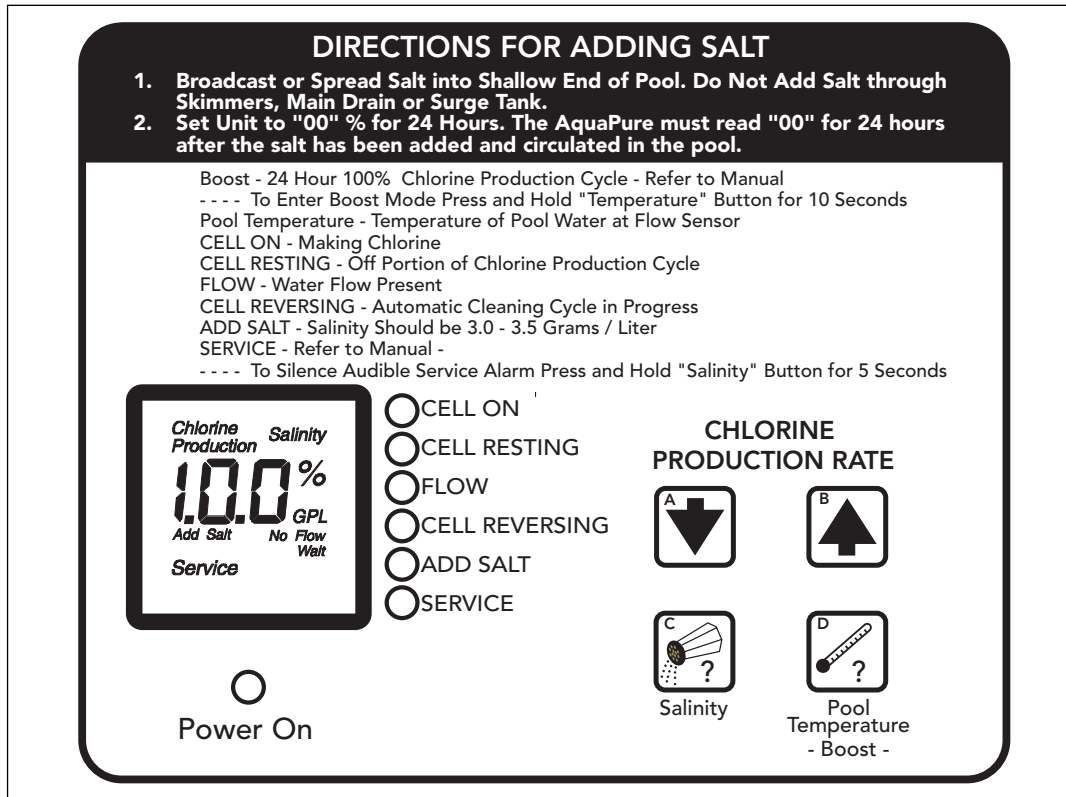


Figure 7. Power Supply Front Panel

5.1 Controls

Chlorine Production Rate (more or less) Adjustment Pressing the arrow button **A** or arrow button **B** will change the **CHLORINE PRODUCTION** in 1% increments. Generally, adjustments to production should be made in 10% increments.

Salinity Press the **Salinity** button **C** to check the salinity of the water in pool.

Boost Press and hold the **Temperature** button **D** for 10 seconds to enter the **Boost** mode (Note 'bo' will flash intermittently). **Boost** can be used to set chlorine production to maximum (100%) for 24 hours of operation. After 24 hours of chlorinator run time, chlorine production will return to previous setting. To clear the **Boost** mode, press and hold the **Temperature** button again for 10 seconds.

NOTE When a pool pump timer is used to limit chlorinator run time, the 24 hours will only count down when the chlorinator is on.

Temperature Press the **Temperature** button **D** to check the pool water temperature. Temperature measurements can be displayed in either Fahrenheit or Celsius. See Section 8, page 28.

5.2 Display

Cell On The **CELL ON** indicator shows that the cell has been turned on by the power supply. Some reasons for the **CELL ON** indicator not being on during normal operation, are: **CHLORINE PRODUCTION** set to 00%, **CHLORINE PRODUCTION** set to less than 100% and **Cell Resting** appears during cell rest period, **NO FLOW** condition, two minutes before automatic cleaning cycle, Low temperature cut off has been activated, or a service related problem such as a salinity level below 2.0 gpl or salinity level too high.

- Cell Resting** During the Normal chlorine production cycle when the unit is set for less than 100% the cell will periodically rest, i.e., not make chlorine. The **CELL RESTING** indicator shows that the cell has been turned off by the power supply. The reason for the **CELL RESTING** indicator, during normal operation, is **CHLORINE PRODUCTION** set to less than 100%.
- Flow or No Flow Indication** When the power supply determines that water is flowing past the Flow/Temp/Salinity Sensor, the **FLOW** indicator is displayed. When no flow is detected, the **NO FLOW** is displayed and the cell is turned off.
- Cell Reversing** The automatic cleaning cycle of the Chlorinator is in progress. The cleaning cycle is factory set and cannot be adjusted. Cell Reversing does not interrupt the production of Chlorine.
- Salinity** Salinity is displayed along with the **gpl** (grams per liter) indicator, when the **Salinity** button is depressed. If a reading of HH appears, the salinity is above 4.5 to 6.5 gpl (depending on pool temperature) and is too high to measure correctly (at normal temperatures). Maintain Salinity between 3.0 and 3.5 gpl. See pages 13 through 16.
- Add Salt** The **ADD SALT** indicator comes on when the Flow/Temp/Salinity Sensor determines that the salinity level of the pool water is too low. Maintain Salinity between 3.0 and 3.5 gpl.
- Service and Service Code** The **SERVICE** indicator will turn on whenever the Chlorinator detects a problem that requires attention. The **SERVICE** indicator is accompanied by a service code displayed on the front panel, displayed as a 3 digit code. The service code(s) are displayed twice per minute with an audible alarm.
- NOTE** See “Service Codes” page 27. Problems can range from insufficient salinity to the DC cord not connected. See troubleshooting.
- Beep Audible Alarm** An audible alarm (beep) sounds twice per minute when a **Service** condition is detected. The Alarm can be cleared by pressing and holding the **Salinity** button **C** for 5 seconds. The audio alarm can be cleared for 24 hours or until the power to the unit is turned off and back on whichever comes first. However, the audio alarm will return if a new problem is detected.
- Wait** The **WAIT** indicator will turn on whenever the Chlorinator computer is self calibrating the Flow/Temp/Salinity Sensor usually for not more than 6 minutes.

5.3 Operation

CAUTION

Before attempting to operate refer to page 11 - Pool Water Preparation. Also, do not adjust Chlorine production above 00% until it is certain that salt has been dissolved in pool. Operating without salt will damage Electrolytic Cell.

Use of an external Pool Pump Timer is not required. The Chlorinator is designed to supply a sufficient amount of chlorine to sanitize pool water on a daily basis. If the Chlorinator is operated 24 hours a day at 100%, more chlorine would be generated than would be needed by most pools (1-3 PPM). The Chlorinator has its own internal timer which cycles the electrolytic cell on and off depending on what percent the Chlorine Production is set. For instance, at 100% the cell works all the time. When set at 90%, the cell is allowed to rest 10% of the time prolonging cell life. In order to fine tune the Chlorinator to any size pool just increase or decrease the Chlorine Production from 1% to 100%. (see “Apply Power” Section 5.4.2, page 19, steps 1-5)

- Check Chlorine Level on a regular basis and adjust Chlorinator accordingly.

If you use a Pool Pump Timer The National Spa and Pool Institute (NSPI) recommends that all water in a residential pool pass through the filtration system at least once every 12 hours (referred to as pool water turnover). However, many factors have an effect on actual pump and filter system run times. Pool size, source of water, direct sun light, indoor/outdoor, screened/unscreened, filtration system, cold or hot weather, swimmer load, rain, organic debris, algae, etc., are all factors which contribute to either more or less pool pump and filter system run times. Because of these differences, it is extremely difficult to set an initial run time (starting point) for the pool pump and chlorinating system.

Try initially setting the Pool Pump Timer to 12 hours. It will take a few days to get just the right amount pool pump operating time. Adjust accordingly using the steps listed below (Section 5.4.2, steps 1-5). When the Chlorinator is wired with a Pool Pump Timer (See page 6 figure 2) **results will vary greatly from one pool installation to the next, so this should be discussed with either the pool builder or the local pool professional. The key points are:**

- Operate pool pump at least the minimum time needed for good filtration.
- The Pool Pump Timer reduces energy consumption.

NOTE Exception - For Cold Weather Operation: If the Chlorinator is run 24 hours a day through the winter, extremely cold water temperatures can effect Cell life. Sometimes it will be necessary to run the Chlorinator at a very low production rate of 10% to 20% or to turn the unit off. See winterizing on page 22.

5.4 Startup

5.4.1 Shocking

Shocking (Super Chlorination) is recommended before pool startup. Start out with good pool water from the beginning. The Chlorinator will build up a sufficient level of chlorine for sanitation in several hours. However, if pool water has a high demand from the startup the Chlorinator will not be able to produce enough chlorine to reach break point chlorination. So, it is best to super chlorinate from an outside source at the time of pool startup. Then, wait until the chlorine level has returned to 1 to 3 PPM before turning on the Chlorinator.

5.4.2 Apply power

When the Chlorinator is first turned on (cold), the unit will beep. Next it will self-calibrate the Flow/Temp/Salinity Sensor. It will then go into normal operation, and the LCD will display the current setting for Chlorine Production (00% to 100%).

1. Turn on the pool pump switch or Pool Pump Timer. After going through an internal test and calibration, the LCD will display the current setting for Chlorine Production (00% to 100%). During the calibration period “Wait” will appear. “Wait” means the unit is self calibrating and doing internal testing. This usually takes less than 6 minutes.
2. Check salinity level by pressing the **Salinity** button. It should read between 3.0 gpl and 3.5 gpl. If it does not then press the **Salinity** button two or three more times until the salinity reading stabilizes.

NOTE If still less than 3.0 gpl refer to pages 13 through 16 and adjust salt level. (Maintain the Recommended Salinity Level of 3.0 to 3.5 gpl). If salinity is below 2.0 gpl the Chlorinator will automatically turn the cell off until the salinity is raised above 2.0 gpl, since operating with low salt will damage Cell. Likewise, if salinity is above the range of measurement the Chlorinator will automatically turn the cell off until the salinity is lowered to a measurable level, since operating with high salt will damage the power supply. If salinity is greater than 3.5 gpl, see Troubleshooting, page 24.

3. Adjust the Chlorine Production to 50% by pressing the arrow button **B**.

4. After 24 hours, use a reliable test kit to test the pool water for free active chlorine. The ideal range to maintain is 1-3 PPM. If the chlorine content of the pool water is *too low, increase chlorine production pressing the arrow button B*. If the chlorine content of the water is *too high, Decrease chlorine production pressing the arrow button A*. Adjust in 10% increments initially then in smaller increments as the correct chlorine level is approached.
5. Due to a varying chlorine demand of pool water, it may take a few days to determine the correct pool pump operating time and chlorine production percentage setting for your pool. Continue adjusting as necessary, allowing 24 hours between adjustments until the chlorine content of the pool water has stabilized at 1-3 PPM.

5.5 Operating in Winter

See Winterizing on Page 22.

5.6 Recommendations

DO List

- Read and keep your manual in a safe place.
- Increase Chlorine Production before party time and return to normal afterwards.
- Increase Chlorine Production when temperature goes up.
- Increase Chlorine Production when number of guests goes up.
- Use Stabilizer (Cyanuric Acid) to Stabilize Chlorine in Pool.
- Mount Power Supply in shade or out of the direct sunlight whenever possible.
- Decrease Production when temperature goes down. Fall/winter etc.
- Take Pool water sample to Pool Professional once per month.

DON'T List

- Do not get fertilizer in your pool. Fertilizers contain nitrates which cause a high chlorine demand on pool water.
- Never use dry acid to adjust pH in arid geographic areas with excessive evaporation and minimal dilution of pool water with fresh water. A build up of by products can damage the electrolytic cell.
- Do not add any pool water balancing chemicals (including salt) unless the Chlorinator is turned off.
- Do not let Chlorine Stabilizer drop below 50 PPM.
- Do not add salt without first checking the pool salinity level. Too much salt can disable and possibly damage the chlorinator.

Section 6. User Maintenance Instructions

The following information describe how to care for your Chlorinator.

6.1 Daily

None.

6.2 Weekly

1. **Chlorine Test.** Test pool water chlorine level with a reliable test kit. Maintain ideal range by adjusting the Chlorinator chlorine production rate as discussed on page 20 step 3, 4, and 5. Recommended Free Chlorine is 2-3 PPM.

NOTE It is recommended that chlorine test samples be taken from two places, one at the pool return line, the other well away from the pool return line. Compare the samples. A higher level should be found at the pool return line. The higher level at the pool return line indicates the Chlorinator is producing chlorine.

2. **pH Level Test.** Test the pH level of your pool with a test kit. If necessary, adjust according to your pool professional's recommendations. NSPI standard of 7.2 - 7.8 is recommended.

NOTE Never use dry acid to adjust pH in arid geographic areas with excessive evaporation and minimal dilution of pool water with fresh water. A build up of by products can damage the electrolytic cell.

6.3 Monthly

1. **Salt Level Test.** Test pool water salt level by depressing the **Salinity** button **C** and reading the LCD located on the front cover of the Chlorinator power supply. Maintain the ideal range of 3.0-3.5 gpl for optimum performance of the Chlorinator. If additional salt is required, follow the procedures and charts described on pages 13-16. If salt level does not rise after 24 hours, see Troubleshooting on page 24.
2. **Pool Water Sample.** Take water sample to local pool store for testing.
3. **Total Alkalinity Test.** Test pool water for total alkalinity with a test kit. Adjust according to your pool professional's recommendations. 80-120 PPM NSPI Standard.
4. **Stabilizer (Cyanuric Acid).** Test pool water stabilizer (*cyanuric acid*) level using a test kit or by having a water sample tested by a pool professional. Maintain ideal range of 50-75 PPM. Follow your pool professional's recommendations.
5. **Calcium Hardness.** Test pool water for calcium hardness level using test kit or by having a water sample tested by a pool professional. If necessary, adjust according to your pool professional's recommendations. NSPI standard of 200-400 PPM is recommended.
6. **Metals Test.** It is recommended that the pool water be tested periodically for the presence of metals such as copper, iron, and manganese. These metals should not be present in the pool water. If those metals are present, contact the local pool professional.

6.4 Electrolytic Cell Cleaning - As Needed

1. **Automatic Cleaning.** The power supply has an automatic cell cleaning feature (Cell Reversing) that removes scale deposits from the electrolytic cell.

NOTE Automatic Cleaning does not interrupt Chlorine Production.

“Scale” is a white crusty deposit that forms in excessively hard water or from pool water that is out of balance and in a scaling condition. Following the installation of the Chlorinator, check the cell once a month for several months. If the cell is clean, replace and re-check at the end of each swimming season. If the cell shows excessive scaling, go on to Step 2, Acid Wash Cleaning.

2. **Acid Wash Cleaning.** If the electrolytic cell has a tendency to scale, it is recommended that every two months the cell be removed and inspected for scale formation and/or debris. Some filters allow debris to pass through to the cell which could lodge between the plates in the cell. A small amount of scale formation is normal. If by looking through the cell it is observed that there is excessive scale formation between the plates or debris is present, the cell must be cleaned as follows:
 - a. Use a high pressure jet of water from a garden hose. If the cell cannot be reasonably cleaned in this manner, acid cleaning is necessary.
 - b. To acid clean the cell, mix one quart of muriatic acid with one gallon of tap water in a plastic bucket. ***Always add acid to the water, never add water to the acid. Always wear eye protection and use rubber gloves. Always work in a well ventilated area.***
 - c. Immerse the cell in the solution. A foaming action will begin, which is caused by scale (calcium carbonate) being dissolved from the plates. If rigorous foaming action does not begin, the cell does not need to be cleaned (***STOP THE CLEANING PROCESS- go on to next step “d”***). Otherwise allow the cell to remain in the solution until the foaming has stopped. ***However, do not leave in acid for more than 1/2 hour. *(Excessive Acid Washing will damage Electrolytic Cell).***
 - d. Rinse the cell thoroughly with clean tap water and inspect. If deposits are still visible, immerse the cell again in the solution for further cleaning. Additional acid may need to be added to the solution.
 - e. Rinse the cell again with clean tap water and inspect. If clean, replace the cell and resume normal operation.
 - f. If the acid wash procedure is necessary, it is recommended that a sample of pool water be analyzed by an authorized Chlorinator service representative for excessive hardness and/or improper water balance.
 - g. If no scale or debris deposits are observed in the cell after two bimonthly inspections, it is not necessary to continue bimonthly inspections. However, due to possible changes in pool water chemistry and filtering effectiveness, it is recommended that the cell be removed for inspection at least twice a year.

6.5 Flow/Temp/Salinity Sensor Cleaning

One time per year or as needed. It is rare but scale formations on the Flow/Temp/Salinity Sensor sometimes occur and will affect the accuracy of the salinity test.

1. Remove Flow/Temp/Salinity Sensor from the threaded PVC Tee by turning counterclockwise.
2. Brush with a mildly abrasive green fiber household cleaning pad. Contacts should be clean and bright.
3. Thoroughly rinse the Flow/Temp/Salinity Sensor with clean tap water. Replace and resume normal operation.

4. **Turn power off and back on in order to recalibrate and reset Flow/Temp/Salinity Sensor. Reset anytime Flow/Temp/Salinity Sensor is unplugged.**

6.6 Winterizing

Very little chlorine is needed in cold water. Below 51 Degrees Fahrenheit chlorine production is not permitted, i.e., operating chlorinator in cold water might allow the pool water to become over chlorinated. If more chlorine should be needed, **activating the "Boost" mode will override this cold water feature allowing chlorine production for 24 hours of operation.** See page 17.

If preventative measures are not taken, freezing water may cause severe damage to the Cell and Flow/Temp/Salinity Sensor. Prevent freeze damage to the Cell and Flow/Temp/Salinity Sensor by running pump continuously or winterize pool by draining water from pump, filter, and all intake and return lines. Remove the cell, clean and store it. Remove Flow/Temp/Salinity Sensor from the threaded PVC Tee. Wrap Flow/Temp/Salinity Sensor in a plastic bag or protective covering and coil Flow/Temp/Salinity Sensor and DC power cord cables around the power supply for storage.

An optional Spool Piece (Part Number AZ003) is available to replace the cell during winterizing or cell maintenance. This will enable pool pump to circulate water with the cell out the of line. See figure 8.

When a FREEZE CONTROLLER is used on pump equipment and the Chlorinator is run through the winter, turn the Chlorinator CHLORINE PRODUCTION down to 10 - 20%. Otherwise, chlorine production will exceed the recommended level of 1.0 - 3.0 PPM.

NOTE Above 3.0 PPM may cause corrosion of pool metals and possibly cause damage to associated pool equipment.

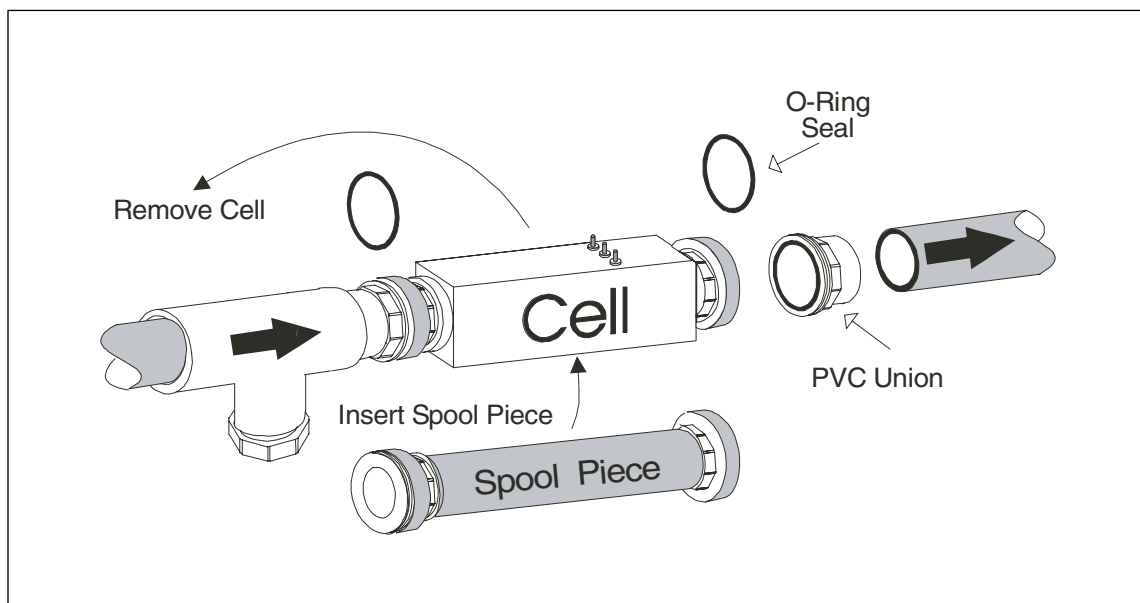


Figure 8. Spool Piece Location

Section 7. Troubleshooting

NOTE: Turn off power to unit prior to attempting service or repair.

7.1 Problems and Corrective Action

Problem	Possible Cause	Corrective Action
Low or no chlorine.	Low <i>stabilizer</i> (cyanuric acid) level in pool water	Add stabilizer to maintain 50 - 75 PPM per pool professional's recommendations. See Stabilizer Chart page 16.
	Insufficient operating hours of the Chlorinator unit.	Increase the Chlorinator operating time per day. See pages 17 through 19.
	CHLORINE PRODUCTION percentage set too low or off at 00%.	Increase chlorine production by pressing the MORE CHLORINE push button. See page 17.
	Recent increases in weather temperature without increasing the chlorine production of your unit.	Increase chlorine production by pressing the MORE CHLORINE push button. See page 17.
	Temporary loss of chlorine due to heavy organic load - rain, leaves, fertilizer or heavy bather load (Recent party!). Pets using pool.	Set "Boost" mode and allow to run for 24 hours. Recheck, If still too low, Super Chlorinate with outside source. (Take pool water sample to Pool Professional). See page 17 and 19.
	Low (Less than 2.5) gpl salt level in pool water.	Test salinity by pressing the Test Salinity button. See Chart page 15.
	High nitrate level.	Contact Pool Professional.
	Metals present in pool water.	Contact Pool Professional.
	New pool water. Not shocked properly upon startup.	Super Chlorinate Pool. See page 19.
	Clogged or dirty cell.	Remove cell for inspection. Clean if necessary. See page 21.

Problem	Possible Cause	Corrective Action
No display on LCD (<i>Screen is blank</i>).	No Power to Unit.	Check power. Turn on pump. Defective automatic timer or pump switch.
	Loose ribbon cable between front and back PC board.	Check that ribbon cable is fully inserted into connector.
	Incorrectly wired. Unit wired for 230 VAC and connected to 115 VAC.	Check that unit is correctly wired for 230 VAC and connected to 230 VAC.
	Loose or bad connection at white connector between transformer and back PC board.	Check connector at white plug to insure proper connection. If burnt connector contact authorized service representative.

Problem	Possible Cause	Corrective Action
"Cell On" indicator does not come on.	Chlorine Production set to 00%.	Adjust CHLORINE PRODUCTION to desired Percentage.
<i>If No Flow also....</i>	Insufficient water flow. Cell is plugged with debris, pump has lost prime.	Remove obstruction and or clean cell. See Page 21. Prime pump if necessary.
<i>If No Flow also....</i>	Flow/Temp/Salinity Sensor not plugged in.	Plug in Flow/Temp/Salinity Sensor. See page 6 figure 2.
	Salt level below 2.0 gpl.	Add salt as described on pages 13 through 16.

Problem	Possible Cause	Corrective Action
"No Flow" indicator stays on continuously.	Pump fails to provide sufficient water flow.	Check for correct operation of the pump, i.e., loss of pump prime or clogged strainer baskets.
	Closed valves.	Check and correct all valve alignments
	Dirty filter.	Follow filter cleaning procedures
	Obstruction in the Chlorinator cell.	Remove cell for inspection. Follow cleaning procedures. See page 21.
	Flow/Temp/Salinity Sensor not installed properly.	Ensure that the Flow/Temp/Salinity Sensor is installed according to page 10 figure 4, if not contact a pool professional.
	Flow/Temp/Salinity Sensor not plugged in.	Plug Flow/Temp/Salinity Sensor into connector on power supply printed circuit board. Turn power to unit off and back on.(Cycle Power). See page 6 fig. 2.
	Flow/Temp/Salinity Sensor elements covered with PVC glue, taped over, or covered with other debris.	Remove and clean Flow/Temp/Salinity Sensor. Wrap Flow /Salinity sensor threads with teflon tape and reinstall. See page 8, 10 and 21.
	Defective Flow/Temp/Salinity Sensor.	Contact your authorized service representative.

Problem	Possible Cause	Corrective Action
Salt level too high.	Too much salt has been added to pool.	Backwash or partially drain pool and dilute with fresh water until salinity returns to 3.0 gpl to 3.5 gpl.

Problem	Possible Cause	Corrective Action
"Service" Indicator On.	Low salt level in pool water.	Test salinity. Add salt as described on pages 13 through 16.
	Cell requires cleaning.	Refer to Maintenance Procedure for acid wash cleaning. See page 21.
	Cell not working properly after cleaning	Contact your authorized service representative.
	DC power cord not properly connected to the cell.	Check connection. Check for dirt or corrosion around DC cord contacts at Cell. Check Cell studs for same.
	Flow/Temp/Salinity Sensor not plugged in.	Plug Flow/Temp/Salinity Sensor into connector on power supply printed circuit board. (Cycle Power).
	Water temperature too low	Winterize your pool. See page 22.
	All the above have been checked and indicator light is still on	Contact your authorized service representative.

Problem	Possible Cause	Corrective Action
Salt Level Too Low.	Not enough salt added on start up.	Add salt to pool, 3.0 gpl to 3.5 gpl. See pages 13 through 16.
	Heavy Rainfall.	Add salt to pool, 3.0 gpl to 3.5 gpl. See pages 13 through 16.
	Leak in pool.	Repair pool.
	Dirty Flow/Temp/Salinity Sensor contacts or faulty Flow Sensor.	Remove and clean Flow/Temp/Salinity Sensor contacts. Check Flow/Temp/Salinity Sensor cable for damage. See page 22. Verify salinity with Myron "L" meter calibrated for NaCl or test strips.

7.2 Service Codes





Code Number	Possible Cause	Corrective Action
120	Low current in forward direction to Cell	1. Clean cell if necessary (see page 21) 2. Check DC Cord
121	Low current in reverse direction to Cell	1. Clean cell if necessary (see page 21) 2. Check DC Cord
123	Extremely Low current to Cell	1. Clean or replace cell if necessary (see page 21) 2. Check DC Cord
124	Higher than normal Current to Cell	Replace back board
125	Cell needs to be cleaned	Clean cell if necessary (see page 21)
126	Low current in forward direction and VAC input voltage below 100/200 VAC	Contact a pool professional
127	Low current in reverse direction and VAC input voltage below 100/200 VAC	Contact a pool professional
144	Low Salinity (below 2.0 gpl)	Add salt to pool to achieve 3.0 gpl (see pages 13 through 16).
145	High Salinity (above 4.5 gpl)	Backwash filter. Partially drain pool and dilute with fresh water until salinity returns to 3.0 to 3.5 gpl.
170	Possible Front board service condition	Contact an authorized service representative
171	Possible Backboard service condition	Contact an authorized service representative
172	Flow Sensor service condition or flow sensor is unplugged	Contact an authorized service representative
173	Low VAC input voltage and on board power supply is not regulated	Unit wired to improper AC voltage, Contact a pool professional
174	Pool Temperature is too high for operation of AquaPure	Flow/ Salinity Sensor indicates water temperature at sensor above 108 F. Reduce water temperature.
175	Flow Sensor air lock condition or very low salinity	Verify proper Flow/Temp/Salinity Sensor installation see page 10 figure 4. Check salinity with Myron "L" meter calibrated for NaCl or test strips. Add salt as necessary see pages 13 through 16.

7.3 Additional Letter Codes

Code	Condition	Reason
EC	External Control	ORP unit or external controller has shut off chlorine production
Lo	Low Temperature Cutoff	Temperature of Pool is < 50 Deg. F. Chlorine production stopped
bo	Boost	In "Boost" mode unit will operate at 100% production for 24 run time hours.
HH	High-High	Input has exceeded Maximum Range.

Section 8. Temperature Conversion

To display Celsius or Fahrenheit on the digital display.

- 
 1. Press and hold button **D** for 15 seconds (third beep).
- 
 2. Within 5 seconds, momentarily press **C** to enter the Fahrenheit/Celsius change mode.
- 
 3. To toggle between Celsius and Fahrenheit, press **A** or **B**.
- 
 4. Confirm by momentarily pressing **C**. The change will be stored in permanent memory.

NOTE: The Boost mode will normally be activated if the Boost button **D** is depressed for 10 seconds. However, if button **D** is held down an additional 5 seconds (for the third beep), the Boost mode will not be changed.

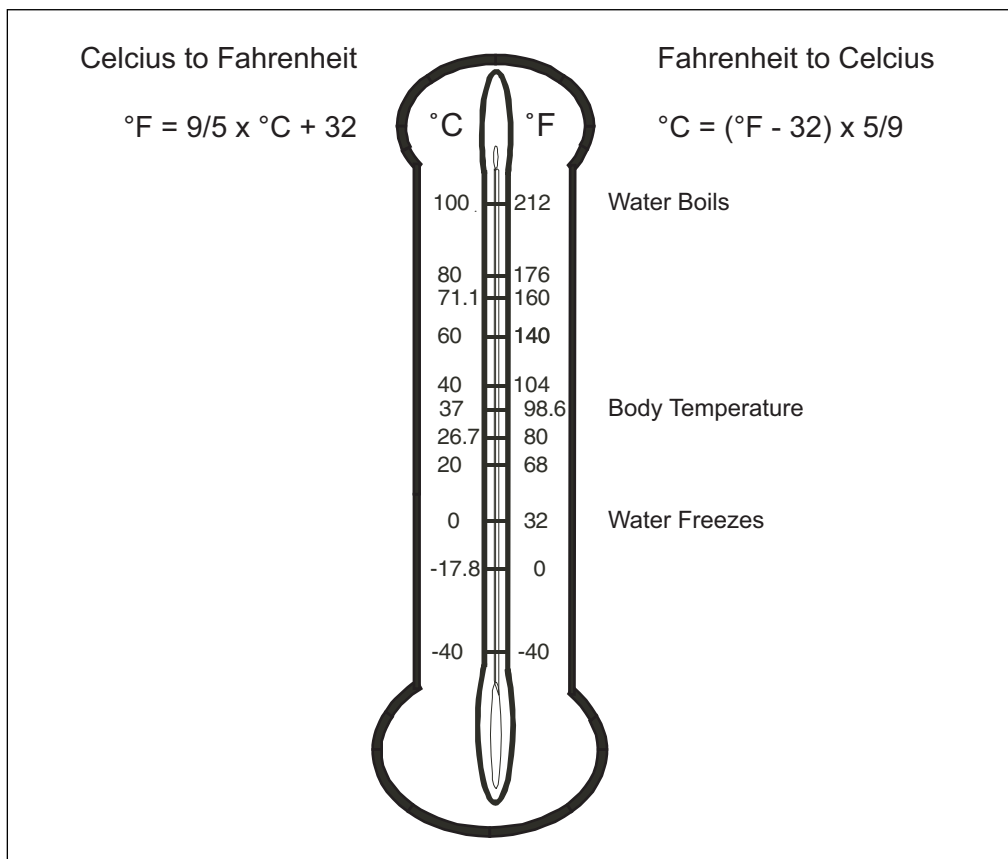


Figure 9. Temperature Conversion Chart

NOTES

NOTES

LIMITED WARRANTY

Thank you for purchasing Jandy® pool and spa products. Water Pik Technologies (manufacturer of Jandy products, including Laars® pool and spa heaters, Air Energy Heat Pumps, and Clormatic Electronic Chlorine Generators) warrants all parts to be free from manufacturing defects in materials and workmanship for a period of one year from the date of retail purchase, with the following exceptions:

- AquaLink® RS units installed with Jandy Surge Protection Kits will be covered for two years.
- NeverLube® valves are warranted for the life of pool and/or spa on which they were originally installed.
- AquaPure™ Electronic Chlorine Generator Electrolytic Cells carry a 5 year limited warranty on a prorated basis.

This warranty is limited to the first retail purchaser, is not transferable, and does not apply to products that have been moved from their original installation sites. The liability of Water Pik Technologies shall not exceed the repair or replacement of defective parts and does not include any costs for labor to remove and reinstall the defective part, transportation to or from the factory, and any other materials required to make the repair. This warranty does not cover failures or malfunctions resulting from the following:

1. Failure to properly install, operate or maintain the product(s) in accordance with our published Installation, Operation and Maintenance Manuals provided with the product(s).
2. The workmanship of any installer of the product(s).
3. Not maintaining a proper chemical balance in your pool and/or spa [pH level between 7.2 and 7.8, Total Alkalinity (TA) between 80 to 120 ppm, Total Dissolved Solids (TDS) less than 2000].
4. Abuse, alteration, accident, fire, flood, lightning, rodents, insects, negligence or acts of God.
5. Scaling, freezing, or other conditions causing inadequate water circulation.
6. Operating the product(s) at water flow rates outside the published minimum and maximum specifications.
7. Use of non-factory authorized parts or accessories in conjunction with the product(s).
8. Chemical contamination of combustion air or improper use of sanitizing chemicals, such as introducing sanitizing chemicals upstream of the heater and cleaner hose or through the skimmer.
9. Overheating, incorrect wire runs; improper electrical supply; collateral damage caused by failure of O-Rings, DE grids, or cartridge elements; or damage caused by running the pump with insufficient quantities of water.

LIMITATION OF LIABILITY:

This is the only warranty given by Water Pik Technologies. No one is authorized to make any other warranties on Water Pik Technologies' behalf. **THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY. WATER PIK TECHNOLOGIES EXPRESSLY DISCLAIMS AND EXCLUDES ANY LIABILITY FOR CONSEQUENTIAL, INCIDENTAL, INDIRECT OR PUNITIVE DAMAGES FOR BREACH OF ANY EXPRESSED OR IMPLIED WARRANTY.** This warranty gives you specific legal rights. You may also have other rights which vary by state or province.

WARRANTY CLAIMS:

For prompt warranty consideration, contact your dealer and provide the following information: proof of purchase, model number, serial number and date of installation. The installer will contact the factory for instructions regarding the claim and to determine the location of the nearest designated service center. If the dealer is not available, you can locate a service center in your area by visiting www.jandy.com or by calling our technical support department at (707) 776-8200 extension 260. All returned parts must have a Returned Material Authorization number to be evaluated under the terms of this warranty.

H0567500B
L14011 Rev 1

Jandy®



A Water Pik Technologies Company
6000 Conдор Drive • Moorpark, CA USA 93021 • 707.776.8200 • Fax 707.763.7785
480 S. Service Road West • Oakville, Ontario, Canada L6K 2H4 • 905.844.8233 • Fax 905.844.2635